



## Electronic Components SMBJ Series TVS Diode SMBJ18CA BI 18V 600W Factory Supply

Our Product Introduction

### Basic Information

- Place of Origin: Shenzhen, Guangdong, China
- Brand Name: SOCAY
- Certification: UL, REACH, RoHS, ISO
- Model Number: SMBJ18CA
- Minimum Order Quantity: 5000PCS
- Price: Negotiable
- Packaging Details: tape reel
- Delivery Time: 1-2weeks
- Payment Terms: T/T, Western Union
- Supply Ability: 10000000pcs



### Product Specification

- Product Name: TVS Diodes
- Package Type: DO-214AA/SMB
- Vrwm: 6.5V
- Vbr@It (Min.): 6.40V
- Vbr@It (Max.): 7.22V
- It: 10mA
- Vc@Ipp: 11.2V
- Ipp: 53.57A
- Ir@Vrwm: 800μA
- Storage Temperature Range: -55 To +150

for more products please visit us on [socaydiode.com](http://socaydiode.com)

## Product Description

### Electronic Components SMBJ Series TVS Diode SMBJ18CA BI 18V 600W Factory Supply

**SMBJ Series TVS Diode DATASHEET: [SMBJ\\_v88.2.pdf](#)**

#### SMBJ Series TVS Diode Description:

SMBJ Series TVS Diode is components that are used to protect sensitive components such as semiconductors. Applications of Transient Voltage Suppressor Diode can be found in Data and Signal lines, Microprocessor and MOS memory, AC/DC power lines, and Telecommunication Equipments. SMBJ Series TVS Diode's main features: low clamping voltage, doesn't degrade, broad voltage spectrum, extremely fast response time, limited surge current rating, high capacitance for low voltage types. SMBJ Series TVS Diode are ideal for the protection of I/O interfaces,  $V_{CC}$  bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

| TVS Diode Part Number |          | TVS Diode Marking |    | TVS Diode Reverse Stand-Off Voltage VRWM (V) | Breakdown Voltage VBR (V) @IT |       | TVS Diode Test Current IT (mA) | TVS Diode Maximum Clamping Voltage VC @IPP (V) | Maximum Peak Pulse Current IPP (A) | Maximum Reverse Leakage IR @VRWM (μA) |
|-----------------------|----------|-------------------|----|----------------------------------------------|-------------------------------|-------|--------------------------------|------------------------------------------------|------------------------------------|---------------------------------------|
| Uni                   | Bi       | Uni               | Bi |                                              | MIN                           | MAX   |                                |                                                |                                    |                                       |
| SMBJ17A               | SMBJ17CA | LR                | BR | 17.0                                         | 18.90                         | 20.90 | 1                              | 27.6                                           | 21.74                              | 5                                     |
| SMBJ18A               | SMBJ18CA | LT                | BT | 18.0                                         | 20.00                         | 22.10 | 1                              | 29.2                                           | 20.55                              | 5                                     |

| Part Number |           | Marking |    | Reverse Stand-Off Voltage VRWM (V) | Breakdown Voltage VBR (V) @IT |       | Test Current IT (mA) | Maximum Clamping Voltage VC @IPP (V) | Maximum Peak Pulse Current IPP (A) | Maximum Reverse Leakage IR @VRWM (μA) |
|-------------|-----------|---------|----|------------------------------------|-------------------------------|-------|----------------------|--------------------------------------|------------------------------------|---------------------------------------|
| Uni         | Bi        | Uni     | Bi |                                    | MIN                           | MAX   |                      |                                      |                                    |                                       |
| SMBJ3.3A    | —         | K1      | —  | 3.3                                | 5.20                          | 6.50  | 10                   | 8.0                                  | 75.00                              | 600                                   |
| SMBJ5.0A    | SMBJ5.0CA | KE      | AE | 5.0                                | 6.40                          | 7.00  | 10                   | 9.2                                  | 65.22                              | 800                                   |
| SMBJ6.0A    | SMBJ6.0CA | KG      | AG | 6.0                                | 6.67                          | 7.37  | 10                   | 10.3                                 | 58.25                              | 800                                   |
| SMBJ6.5A    | SMBJ6.5CA | KK      | AK | 6.5                                | 7.22                          | 7.98  | 10                   | 11.2                                 | 53.57                              | 500                                   |
| SMBJ7.0A    | SMBJ7.0CA | KM      | AM | 7.0                                | 7.78                          | 8.60  | 10                   | 12.0                                 | 50.00                              | 200                                   |
| SMBJ7.5A    | SMBJ7.5CA | KP      | AP | 7.5                                | 8.33                          | 9.21  | 1                    | 12.9                                 | 46.51                              | 100                                   |
| SMBJ8.0A    | SMBJ8.0CA | KR      | AR | 8.0                                | 8.89                          | 9.83  | 1                    | 13.6                                 | 44.12                              | 50                                    |
| SMBJ8.5A    | SMBJ8.5CA | KT      | AT | 8.5                                | 9.44                          | 10.40 | 1                    | 14.4                                 | 41.67                              | 10                                    |
| SMBJ9.0A    | SMBJ9.0CA | KV      | AV | 9.0                                | 10.00                         | 11.10 | 1                    | 15.4                                 | 38.96                              | 5                                     |
| SMBJ10A     | SMBJ10CA  | KX      | AX | 10.0                               | 11.10                         | 12.30 | 1                    | 17.0                                 | 35.29                              | 5                                     |
| SMBJ11A     | SMBJ11CA  | KZ      | WZ | 11.0                               | 12.20                         | 13.50 | 1                    | 18.2                                 | 32.97                              | 5                                     |
| SMBJ12A     | SMBJ12CA  | LE      | BE | 12.0                               | 13.30                         | 14.70 | 1                    | 19.9                                 | 30.15                              | 5                                     |
| SMBJ13A     | SMBJ13CA  | LG      | BG | 13.0                               | 14.40                         | 15.90 | 1                    | 21.5                                 | 27.91                              | 5                                     |
| SMBJ14A     | SMBJ14CA  | LK      | BK | 14.0                               | 15.60                         | 17.20 | 1                    | 23.2                                 | 25.86                              | 5                                     |
| SMBJ15A     | SMBJ15CA  | LM      | BM | 15.0                               | 16.70                         | 18.50 | 1                    | 24.4                                 | 24.59                              | 5                                     |
| SMBJ16A     | SMBJ16CA  | LP      | BP | 16.0                               | 17.80                         | 19.70 | 1                    | 26.0                                 | 23.08                              | 5                                     |
| SMBJ17A     | SMBJ17CA  | LR      | BR | 17.0                               | 18.90                         | 20.90 | 1                    | 27.6                                 | 21.74                              | 5                                     |
| SMBJ18A     | SMBJ18CA  | LT      | BT | 18.0                               | 20.00                         | 22.10 | 1                    | 29.2                                 | 20.55                              | 5                                     |
| SMBJ19A     | SMBJ19CA  | LB      | BB | 19.0                               | 21.10                         | 23.30 | 1                    | 30.8                                 | 19.49                              | 5                                     |
| SMBJ20A     | SMBJ20CA  | LV      | BV | 20.0                               | 22.20                         | 24.50 | 1                    | 32.4                                 | 18.52                              | 5                                     |
| SMBJ22A     | SMBJ22CA  | LX      | BX | 22.0                               | 24.40                         | 26.90 | 1                    | 35.5                                 | 16.90                              | 5                                     |
| SMBJ24A     | SMBJ24CA  | LZ      | BZ | 24.0                               | 26.70                         | 29.50 | 1                    | 38.9                                 | 15.42                              | 5                                     |
| SMBJ26A     | SMBJ26CA  | ME      | CE | 26.0                               | 28.90                         | 31.90 | 1                    | 42.1                                 | 14.25                              | 5                                     |
| SMBJ28A     | SMBJ28CA  | MG      | CG | 28.0                               | 31.10                         | 34.40 | 1                    | 45.4                                 | 13.22                              | 5                                     |
| SMBJ30A     | SMBJ30CA  | MK      | CK | 30.0                               | 33.30                         | 36.80 | 1                    | 48.4                                 | 12.40                              | 5                                     |
| SMBJ33A     | SMBJ33CA  | MM      | CM | 33.0                               | 36.70                         | 40.60 | 1                    | 53.3                                 | 11.26                              | 5                                     |
| SMBJ36A     | SMBJ36CA  | MP      | CP | 36.0                               | 40.00                         | 44.20 | 1                    | 58.1                                 | 10.33                              | 5                                     |
| SMBJ40A     | SMBJ40CA  | MR      | CR | 40.0                               | 44.40                         | 49.10 | 1                    | 64.5                                 | 9.30                               | 5                                     |
| SMBJ43A     | SMBJ43CA  | MT      | CT | 43.0                               | 47.80                         | 52.80 | 1                    | 69.4                                 | 8.65                               | 5                                     |

# Electrical Characteristics (T<sub>A</sub>=25°C unless otherwise noted) (Continue)

| Part Number |           | Marking |    | Reverse Stand-Off Voltage<br>V <sub>RRM</sub> (V) | Breakdown Voltage V <sub>BR</sub> (V)<br>@I <sub>R</sub> |        | Test Current<br>I <sub>T</sub> (mA) | Maximum Clamping Voltage<br>V <sub>C</sub> @I <sub>CC</sub> (V) | Maximum Peak Pulse Current<br>I <sub>PPM</sub> (A) | Maximum Reverse Leakage I <sub>R</sub> @V <sub>RRM</sub> (μA) |
|-------------|-----------|---------|----|---------------------------------------------------|----------------------------------------------------------|--------|-------------------------------------|-----------------------------------------------------------------|----------------------------------------------------|---------------------------------------------------------------|
| Uni         | BI        | Uni     | BI |                                                   | MIN                                                      | MAX    |                                     |                                                                 |                                                    |                                                               |
| SMBJ45A     | SMBJ45CA  | MV      | CV | 45.0                                              | 50.00                                                    | 55.30  | 1                                   | 72.7                                                            | 8.25                                               | 5                                                             |
| SMBJ48A     | SMBJ48CA  | MX      | CX | 48.0                                              | 53.30                                                    | 58.90  | 1                                   | 77.4                                                            | 7.75                                               | 5                                                             |
| SMBJ51A     | SMBJ51CA  | MZ      | CZ | 51.0                                              | 56.70                                                    | 62.70  | 1                                   | 82.4                                                            | 7.28                                               | 5                                                             |
| SMBJ54A     | SMBJ54CA  | NE      | DE | 54.0                                              | 60.00                                                    | 66.30  | 1                                   | 87.1                                                            | 6.89                                               | 5                                                             |
| SMBJ58A     | SMBJ58CA  | NG      | DG | 58.0                                              | 64.40                                                    | 71.20  | 1                                   | 93.6                                                            | 6.41                                               | 5                                                             |
| SMBJ60A     | SMBJ60CA  | NK      | DK | 60.0                                              | 66.70                                                    | 73.70  | 1                                   | 96.8                                                            | 6.20                                               | 5                                                             |
| SMBJ64A     | SMBJ64CA  | NM      | DM | 64.0                                              | 71.10                                                    | 78.60  | 1                                   | 103.0                                                           | 5.83                                               | 5                                                             |
| SMBJ70A     | SMBJ70CA  | NP      | DP | 70.0                                              | 77.80                                                    | 86.00  | 1                                   | 113.0                                                           | 5.31                                               | 5                                                             |
| SMBJ75A     | SMBJ75CA  | NR      | DR | 75.0                                              | 83.30                                                    | 92.10  | 1                                   | 121.0                                                           | 4.96                                               | 5                                                             |
| SMBJ78A     | SMBJ78CA  | NT      | DT | 78.0                                              | 86.70                                                    | 95.80  | 1                                   | 126.0                                                           | 4.76                                               | 5                                                             |
| SMBJ80A     | SMBJ80CA  | NB      | DB | 80.0                                              | 88.80                                                    | 97.60  | 1                                   | 129.6                                                           | 4.63                                               | 5                                                             |
| SMBJ85A     | SMBJ85CA  | NV      | DV | 85.0                                              | 94.40                                                    | 104.00 | 1                                   | 137.0                                                           | 4.38                                               | 5                                                             |
| SMBJ90A     | SMBJ90CA  | NX      | DX | 90.0                                              | 100.00                                                   | 111.00 | 1                                   | 146.0                                                           | 4.11                                               | 5                                                             |
| SMBJ100A    | SMBJ100CA | NZ      | DZ | 100.0                                             | 111.00                                                   | 123.00 | 1                                   | 162.0                                                           | 3.70                                               | 5                                                             |
| SMBJ110A    | SMBJ110CA | PE      | EE | 110.0                                             | 122.00                                                   | 135.00 | 1                                   | 177.0                                                           | 3.39                                               | 5                                                             |
| SMBJ120A    | SMBJ120CA | PG      | EG | 120.0                                             | 133.00                                                   | 147.00 | 1                                   | 193.0                                                           | 3.11                                               | 5                                                             |
| SMBJ130A    | SMBJ130CA | PK      | EK | 130.0                                             | 144.00                                                   | 159.00 | 1                                   | 209.0                                                           | 2.87                                               | 5                                                             |
| SMBJ140A    | SMBJ140CA | PB      | EB | 140.0                                             | 155.00                                                   | 171.00 | 1                                   | 226.8                                                           | 2.65                                               | 5                                                             |
| SMBJ150A    | SMBJ150CA | PM      | EM | 150.0                                             | 167.00                                                   | 185.00 | 1                                   | 243.0                                                           | 2.47                                               | 5                                                             |
| SMBJ160A    | SMBJ160CA | PP      | EP | 160.0                                             | 178.00                                                   | 197.00 | 1                                   | 259.0                                                           | 2.32                                               | 5                                                             |
| SMBJ170A    | SMBJ170CA | PR      | ER | 170.0                                             | 189.00                                                   | 209.00 | 1                                   | 275.0                                                           | 2.18                                               | 5                                                             |
| SMBJ180A    | SMBJ180CA | PT      | ET | 180.0                                             | 201.00                                                   | 220.00 | 1                                   | 291.6                                                           | 2.06                                               | 5                                                             |
| SMBJ190A    | SMBJ190CA | PV      | EV | 190.0                                             | 211.00                                                   | 232.00 | 1                                   | 307.8                                                           | 1.95                                               | 5                                                             |
| SMBJ200A    | SMBJ200CA | PW      | EW | 200.0                                             | 224.00                                                   | 247.00 | 1                                   | 324.0                                                           | 1.85                                               | 5                                                             |
| SMBJ220A    | SMBJ220CA | PX      | EX | 220.0                                             | 246.00                                                   | 272.00 | 1                                   | 356.0                                                           | 1.69                                               | 5                                                             |
| SMBJ250A    | SMBJ250CA | PZ      | EZ | 250.0                                             | 279.00                                                   | 309.00 | 1                                   | 405.0                                                           | 1.48                                               | 5                                                             |
| SMBJ300A    | SMBJ300CA | QE      | FE | 300.0                                             | 335.00                                                   | 371.00 | 1                                   | 486.0                                                           | 1.23                                               | 5                                                             |
| SMBJ350A    | SMBJ350CA | QG      | FG | 350.0                                             | 391.00                                                   | 432.00 | 1                                   | 567.0                                                           | 1.06                                               | 5                                                             |
| SMBJ400A    | SMBJ400CA | QK      | FK | 400.0                                             | 447.00                                                   | 494.00 | 1                                   | 648.0                                                           | 0.93                                               | 5                                                             |
| SMBJ440A    | SMBJ440CA | QM      | FM | 440.0                                             | 492.00                                                   | 543.00 | 1                                   | 713.0                                                           | 0.84                                               | 5                                                             |

## Ratings and Characteristic Curves (T<sub>A</sub>=25°C unless otherwise noted)

Figure 1 - Peak Pulse Power Rating Curve

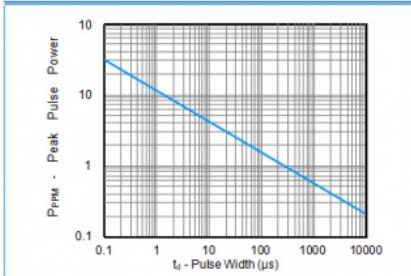


Figure 2 - Pulse Derating Curve

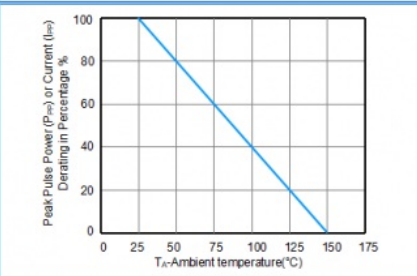


Figure 3 - Pulse Waveform

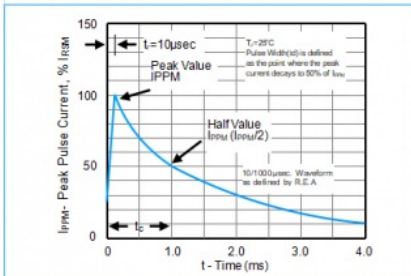


Figure 4 - Typical Junction Capacitance

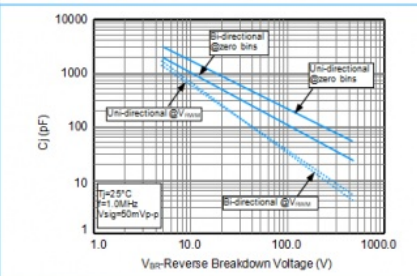


Figure 5 - Steady State Power Derating Curve




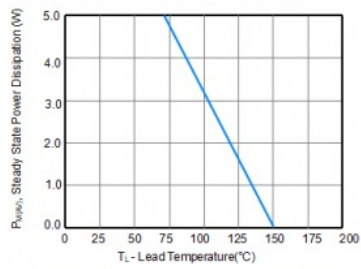


Figure 6 - Maximum Non-Repetitive Surge Current

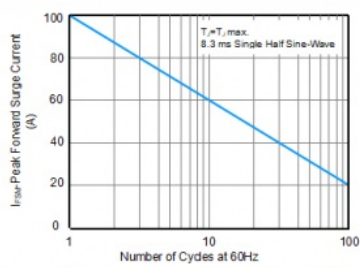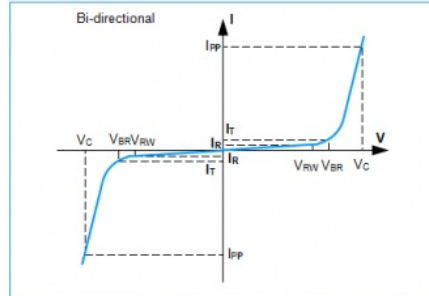

## I-V Curve Characteristics

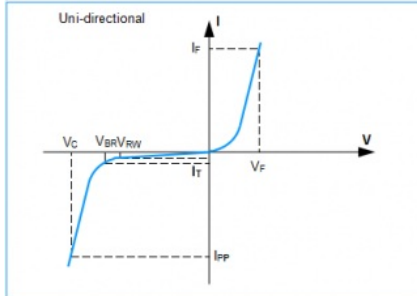


## Physical Specifications

|          |                                                              |
|----------|--------------------------------------------------------------|
| Weight   | 0.003 ounce, 0.093 gram                                      |
| Case     | JEDEC DO-214AA Molded Plastic over glass passivated junction |
| Polarity | Color band denotes cathode except Bipolar                    |
| Terminal | Matte Tin-plated leads, Solderable per JESD22-B102D          |

## Environmental Specifications


|                    |             |
|--------------------|-------------|
| Temperature Cycle  | JESD22-A104 |
| Pressure Cooker    | JESD22-A102 |
| High Temp. Storage | JESD22-A103 |
| HTRB               | JESD22-A108 |
| Thermal Shock      | JESD22-A106 |

## Soldering Parameters

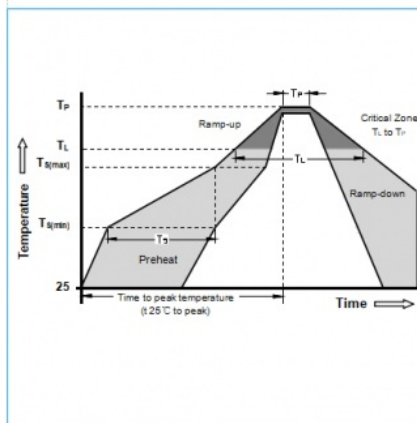


|                                                      |                                               |
|------------------------------------------------------|-----------------------------------------------|
| Reflow Condition                                     | Lead-free assembly                            |
| Pre Heat                                             | -Temperature Min ( $T_{S(min)}$ ) 150°C       |
|                                                      | -Temperature Max ( $T_{S(max)}$ ) 200°C       |
|                                                      | -Time (min to max) ( $T_S$ ) 60 - 180 Seconds |
| Average ramp up rate (Liquidus Temp $T_L$ to peak)   | 3°C/second max                                |
| $T_{S(max)}$ to $T_L$ - Ramp-up Rate                 | 3°C/second max                                |
| Reflow                                               | -Temperature ( $T_L$ ) (Liquidus) 217°C       |
|                                                      | -Time (min to max) ( $T_L$ ) 60 - 150 Seconds |
| Peak Temperature ( $T_P$ )                           | 260 +0/-5°C                                   |
| Time within 5°C of actual peak Temperature ( $t_p$ ) | 20 - 40 Seconds                               |
| Ramp-down Rate                                       | 6°C/second max                                |
| Time 25°C to peak Temperature ( $T_P$ )              | 8 minutes Max                                 |
| Do not exceed                                        | 280°C                                         |

## Part Numbering

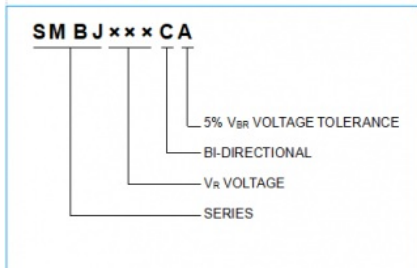


## Part Marking

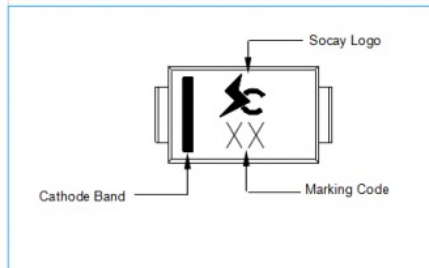

## Dimensions

DO-214AA (SMB)

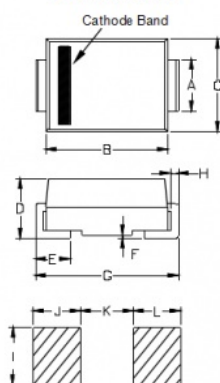


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.073  | 0.087 | 1.85        | 2.21  |
| B          | 0.167  | 0.191 | 4.25        | 4.85  |
| C          | 0.130  | 0.155 | 3.30        | 3.94  |
| D          | 0.085  | 0.104 | 2.15        | 2.65  |
| E          | 0.030  | 0.060 | 0.75        | 1.52  |
| F          | --     | 0.008 | --          | 0.203 |
| G          | 0.200  | 0.220 | 5.08        | 5.59  |
| H          | 0.006  | 0.012 | 0.15        | 0.31  |
| I          | 0.089  | -     | 2.26        | -     |
| J          | 0.085  | -     | 2.10        | -     |
| K          | -      | 0.107 | -           | 2.74  |
| L          | 0.085  | -     | 2.10        | -     |

## Packaging

| Part Number | Component Package | Reel (PCS) | Per Carton (PCS) | Packaging Option           | Reel Diameters (mm) |
|-------------|-------------------|------------|------------------|----------------------------|---------------------|
| SMBJXXXXX   | DO-214AA (SMB)    | 3000       | 48000            | Tape & Reel - 15mm/13"tape | 330.0               |

## Tape and Reel Specifications

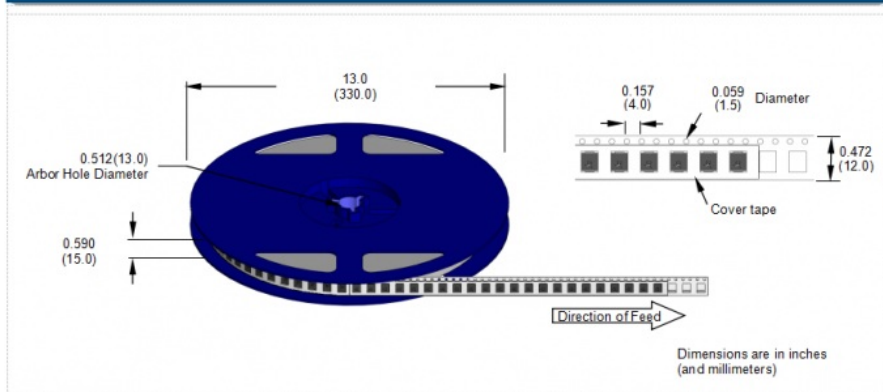

 **SOCAY® Shenzhen Socay Electronics Co., Ltd.**



+8618126201429



sylvia@socay.com



socaydiode.com

4/F, Block C, HeHengXing Science & Technology Park, 19 MinQing Road, LongHua District, Shenzhen City, Guangdong Province, China